
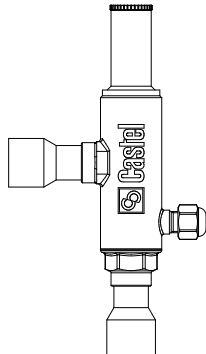


Disegno Drawing Чертёж	N° catalogo Part number N° по каталогу	Attacchi Connections Соединительные концы			Campo di regolazione Regulation range [bar] Диапазон регулирования давления [бар]	Kv [m³/h] Kv [м³/ч]	PS [bar] PS [бар]	TS [°C]		Confezione n° pz Package pcs Упаковка, шт
		SAE Flare раз- вальц SAE	ODS [in.]/ [дюйм]	ODS [mm]				min мин	max макс	
	3330/4	1/2"	-	-	0,2 - 5,5	2,7	28 (1)	- 40	+ 110	15
	3330/5	5/8"	-	-						15
	3330/M12S	-	-	12	0,2 - 5,5	2,7	28 (1)	- 40	+ 110	15
	3330/4S	-	1/2"	-						15
	3330/5S	-	5/8"	16						15
	3330/7S	-	7/8"	22		8				
	3330/9S	-	1.1/8"	-		1				
	3330/M28S	-	-	28		1				
	3330/11S	-	1.3/8"	35	3 - 20	2,7	45	- 40	+ 110	1
	3335/M12S (2)	-	-	12						15
	3335/4S (2)	-	1/2"	-						15
	3335/5S (2)	-	5/8"	16						15
	3335/7S (2)	-	7/8"	22						8

Note:

(1): MWP = 405 psi in conformità a omologazione UL

(1): MWP = 405 psi according to UL approval

Примечание.

(1): Максимальное рабочее давление = 405 psi соответствует значению, одобренному UL.

(2): non omologato UL

(2): not UL approved

(2): не UL утвержден