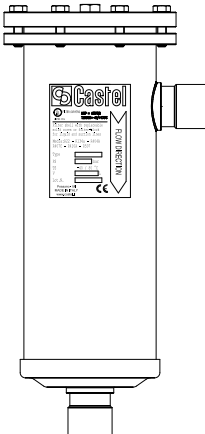


FILTRI DISIDRATATORI A CARTUCCIA SOLIDA RICAMBIABILE- ATTACCHI D'ACCIAIO - OMOLOGATI DA UNDERWRITERS LABORATORIES INC.

FILTER DRIERS WITH REPLACEABLE SOLID CORE - STEEL CONNECTIONS - APPROVED BY UNDERWRITERS LABORATORIES INC.

ФИЛЬТРЫ-ОСУШИТЕЛИ СО СМЕННЫМ ТВЕРДЫМ СЕРДЕЧНИКОМ И СО СТАЛЬНЫМИ СОЕДИНИТЕЛЬНЫМИ ЭЛЕМЕНТАМИ, УТВЕРЖДЕННЫЕ UNDERWRITERS LABORATORIES INC.

Disegno Drawing Чертеж	N° Catalogo Part Number N° по каталогу	Attacchi Connections Соединения			Tipo cartucce Cores type Тип сердеч- ника	N° cartucce N° of cores Тип сердеч- ника	Cubatura nominale Nominal volume Номиналь- ный объем [cm³]	PS [bar]	PS [бар]	TS [°C]		Confezione n° pz Package pcs Кол-во штук в упаковке					
	Coperchio filettato Threaded cover Резьбовая крышка	ODS / внахлест ODS		W													
		Ø [in.] / [дюйм]	Ø [mm]	Ø [mm]				Min / мин.	Max / макс.								
	4411/5AF	5/8"	16	21,3	4490/A 4490/B 4490/AA 4490/AB	1	800	45 (1)	-40	+80	1						
	4411/7AF	7/8"	22	26,9													
	4411/9AF	1.1/8"	-	33,7													
	4411/11AF	1.3/8"	35	42,4													
	4411/13AF	1.5/8"	-	48,3													
	4411/M42AF	-	42	48,3													
	4411/17AF	2.1/8"	54	60,3													
	4411/21AF	2.5/8"	-	76,1													
	4412/7AF	7/8"	22	26,9		2	1600										
	4412/9AF	1.1/8"	-	33,7													
	4412/11AF	1.3/8"	35	42,4													
	4412/13AF	1.5/8"	-	48,3													
	4412/M42AF	-	42	48,3													
	4412/17AF	2.1/8"	54	60,3													
	4413/7AF	7/8"	22	26,9		3	2400										
	4413/9AF	1.1/8"	-	33,7													
	4413/11AF	1.3/8"	35	42,4													
	4413/13AF	1.5/8"	-	48,3													
	4413/M42AF	-	42	48,3													
	4414/11AF	1.3/8"	35	42,4		4	3200										
	4414/13AF	1.5/8"	-	48,3													
	4414/M42AF	-	42	48,3													
	4414/17AF	2.1/8"	54	60,3													
	4423/17A	2.1/8"	54	60,3	4491/A 4491/AA			32 (1)									
	4423/21A	2.5/8"	67	76,1	3	4800											
	4423/25A	3.1/8"	80	88,9													
	4424/25A	3.1/8"	80	88,9													
	4424/34A	4.1/4"	108	114,3	4	6400											

Note:

(1): MWP = 470 psi in conformità a omologazione UL

(1): MWP = 470 psi according to UL approval

Примечание.

(1). Максимальное рабочее давление = 470 psi соответствует значению, одобренному UL.