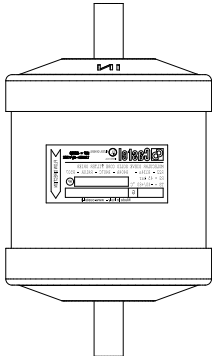


FILTRI DISIDRATATORI A CARTUCCIA SOLIDA 100% SETACCIO MOLECOLARE - ATTACCHI A SALDARE - OMOLOGATI DA UNDERWRITERS LABORATORIES INC.

SOLID CORE FILTER DRIERS 100% MOLECULAR SIEVES - SOLDER CONNECTIONS - APPROVED BY UNDERWRITERS LABORATORIES INC.

ФИЛЬТРЫ-ОСУШИТЕЛИ С ТВЕРДЫМ СЕРДЕЧНИКОМ ИЗ 100% МОЛЕКУЛЯРНОГО СИТА, С СОЕДИНИТЕЛЬНЫМИ КОНЦАМИ ПОД ПАЙКУ, УТВЕРЖДЕННЫЕ UNDERWRITERS LABORATORIES INC

Disegno Drawing Чертёж	N° catalogo Part number N° по каталогу	Codice internazionale International code Международный код	Attacchi Connections Соединительные концы				Cubatura nominale Nominal volume Номинальный объём [cm³]	PS [bar]	TS [°C]	Confezione n° pz Package pcs Упаковка, шт
			ODS / пайку ODS		ODM / пайку ODM					
			Ø [in.]/ [дюйм]	Ø [mm]	Ø [in.]/ [дюйм]	Ø [mm]				
	DF303/2S	032S	1/4"	-	3/8"	-	50	47 (1)	-40 +80	25
	DF303/3S	033S	3/8"	-	1/2"	-	50			25
	DF305/2S	052S	1/4"	-	3/8"	-	80			25
	DF305/3S	053S	3/8"	-	1/2"	-	80			25
	DF305/M10S	-	-	10	-	12	80			25
	DF308/2S	082S	1/4"	-	3/8"	-	130			25
	DF308/3S	083S	3/8"	-	1/2"	-	130			25
	DF308/M10S	-	-	10	-	12	130			25
	DF308/M12S	-	-	12	-	14	130			25
	DF308/4S	084S	1/2"	-	5/8"	16	130			25
	DF316/3S	163S	3/8"	-	1/2"	-	250			15
	DF316/M10S	-	-	10	-	12	250			15
	DF316/M12S	-	-	12	-	14	250			15
	DF316/4S	164S	1/2"	-	5/8"	16	250			15
	DF316/5S	165S	5/8"	16	3/4"	-	250			15
	DF316/7S	167S	7/8"	-	1.1/8"	-	250			15
	DF330/3S	303S	3/8"	-	1/2"	-	500			10
	DF330/4S	304S	1/2"	-	5/8"	16	500			10
	DF330/5S	305S	5/8"	16	3/4"	-	500			10
	DF330/7S	307S	7/8"	-	1.1/8"	-	500			10
	DF330/9S	309S	1.1/8"	-	1.3/8"	35	500			10
	DF341/4S	414S	1/2"	-	5/8"	16	670			6
	DF341/5S	415S	5/8"	16	3/4"	-	670			6
	DF341/6S	416S	3/4"	-	7/8"	-	670			6
	DF341/7S	417S	7/8"	-	1.1/8"	-	670			6
	DF375/4S	754S	1/2"	-	5/8"	16	1340			1
	DF375/5S	755S	5/8"	16	3/4"	-	1340			1
	DF375/6S	756S	3/4"	-	7/8"	-	1340			1
	DF375/7S	757S	7/8"	-	1.1/8"	-	1340			1
	DF375/9S	759S	1.1/8"	-	1.3/8"	35	1340			1

Note:

(1): MWP = 680 psi in conformità a omologazione UL

(1): MWP = 680 psi according to UL approval

Примечание.

(1). Максимальное рабочее давление = 680 psi соответствует значению, одобренному UL.