


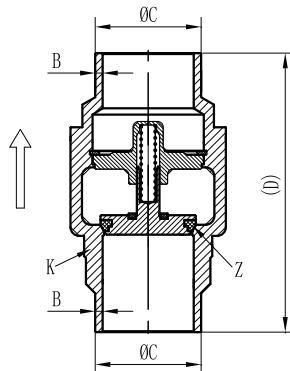


Technical Requirements	X	Y	Z	K
Material	Brass	Copper	PTFE	Steel
The Working Pressure	≤ 16 MPa			
The Suitable Media	R22, R134a, R410A, R502, POE oil and some other refrigerants			
Temperature Range	-40℃~150℃			
Helium Leaking Detecting	leakage ≤ 1.0g/a			
Qualification				

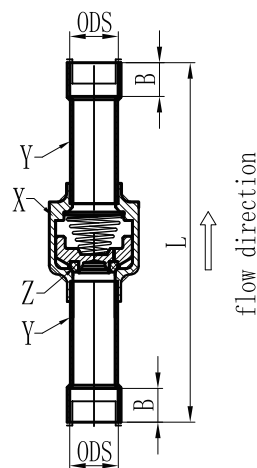

Model	ODS	I mm	Kv m³/h	L mm
LCV001	1/4"	4.5	2.6	105.6
LCV002	3/8"	7.5	4	124
LCV003	1/2"	10.5	4	128
LCV004	5/8"	13	5.7	155.5
LCV005	3/4"	16	9	164.5
LCV006	7/8"	19	15.9	191.5
LCV007	1-1/8"	25	15.9	212.5
LCV008	1-3/8"	31	15.9	248.5
LCV009	1-5/8"	36	24.9	281

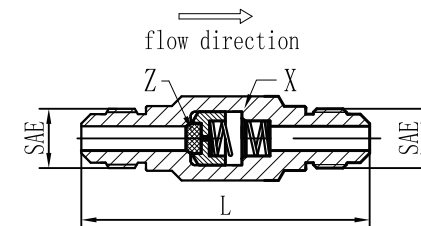

Model	SAE	Kv m³/h	L mm
FCV001	1/4"	0.8	53
FCV002	3/8"	2.2	61.5
FCV003	1/2"	4.4	72
FCV004	5/8"	6.7	79
FCV005	3/4"	10.2	91

Model	"DN"	Kv值 m³/h	B mm	C mm	D mm
WCV01	2寸 (DN50)	99.7	4	Ø60	158
WCV02			4.5	Ø68	
WCV03			5	Ø76	
WCV04	3寸 (DN75)	218.3	5	Ø76	187
WCV05			6	Ø89	
WCV06			7	Ø108	
WCV07	4寸 (DN100)	352.3	7.5	Ø108	225
WCV08			8	Ø133	